



HEBEI SHENG MAI CONSTRUCTION MATERIAL TECHNOLOGY CO.,LTD

Website:www.wiremeshfences.net Email:sales03@fencewiremesh.com Tel:+86-18032888759 Fax:+86-311-85030301

QUOTATION SHEET

Contact person: Sarah Zhou

Garden Fence

Panel:

Using high quality Iron Rod as raw material, the welded panel, after galvanization, Powders Primer, and Powders top coating; it can resist the corrosive and ultraviolet radiation very strongly. The thickness of powder coating is 100-120 microns usually. The choose wire diameters are 6MM*2+5MM*1.8MM*2+6MM*1. It obtains high strong powers to resist the construction.

Fence size: 200 mm x 50 mm x 2.5 Meters x from 630mm - 2630mm or available on request.

Post:

This system usually choose Square Post (50*50mm, 60*60mm), Rectangular Post (80*60*2.5mm, 120*60*3mm) with the high strength and so on. With plastic caps or Roofing rainhat.The finished surface usually is Galvanized and Powder coating, or alternatively.

Fastenings:

The panels and posts are jointed together with bolts or rivets, using the steel flat bar, or special steel clamps, all nuts are self-locking.This also can be designed as the special clients requests.


Application:Boundary and anti intruder

Stand and finish: Galvanized / Polyester coated green

other standard colors available on request

Specification:

Wire Dia	Mesh Size	Panel Height	Panel Width	Post Height	Post Type	Fittings
5/6/5 6/5/6	50*200mm	630mm	2000mm	1000mm	Becaclip Post	Non clamps, Rain cap
		830mm		1200mm		
6/6/6 8/6/8	60*150mm	1230mm	2200mm	1400mm	Square Post	Steel clamp,Plastic clamp,Rain cap
		1530mm		2000mm		
	50*100mm	1830mm	2500mm	2400mm	Round Post	Steel clamp,Plastic clamp,Rain cap
		2030mm		3600mm		
		2430mm	3000mm	3000mm		

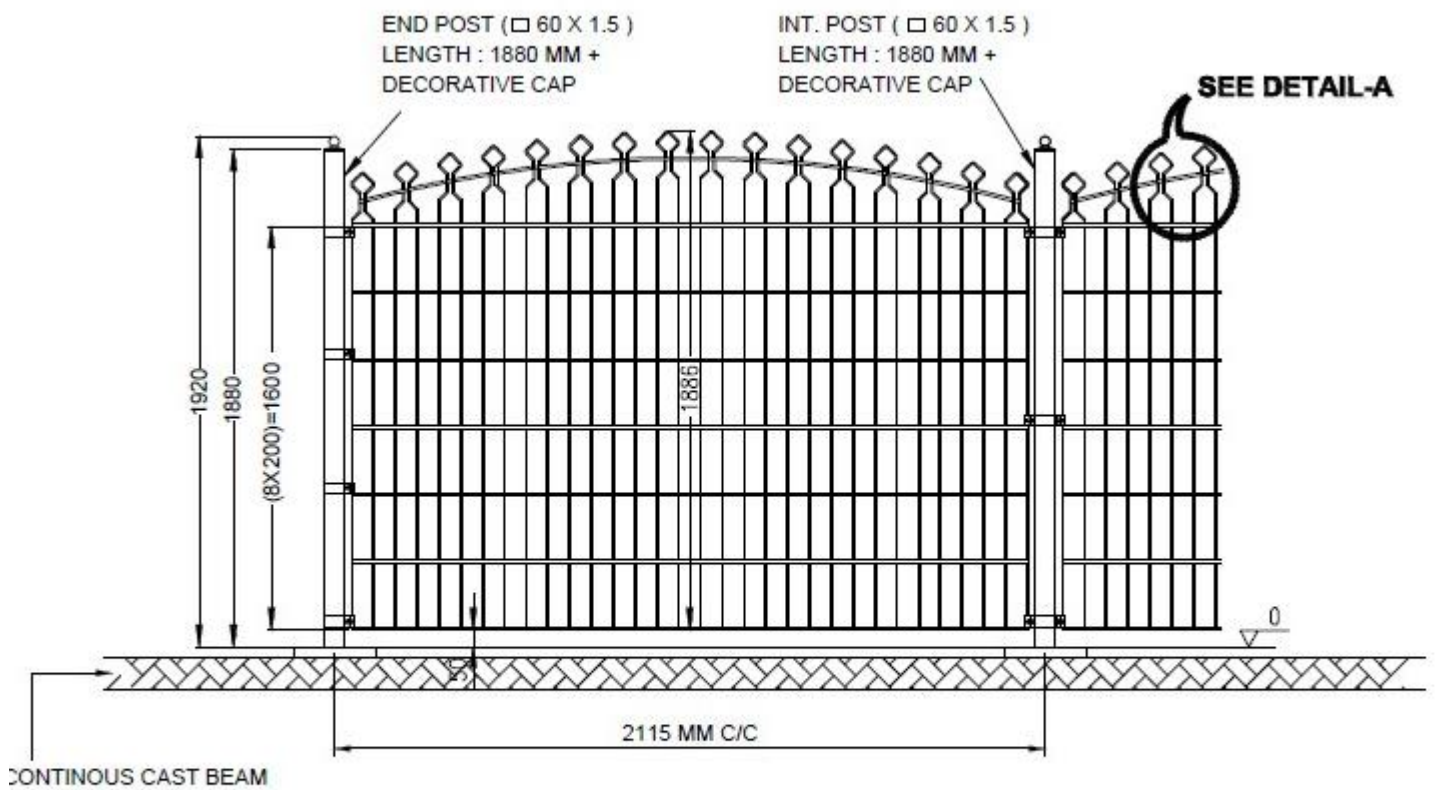

CLSF 868 DECOR FENCE TYPE 'A'-ELEVATION